

10/26/00
JCS03 U.S. PTO

PATENT APPLICATION TRANSMITTAL LETTER

JCS03 U.S. PTO
09/696238
10/26/00

TO THE COMMISSIONER OF PATENTS AND TRADEMARKS:

Transmitted herewith for filing is the patent application of:

Orrin Klitzner and Samuel Geffen

for USER INTERFACE FOR A PORTABLE COMMUNICATION DEVICE

Enclosed are:

- (X) 17 pages of specification and claims.
- (X) Abstract
- (X) 4 sheet(s) of drawings.
- (X) Declaration and Power of Attorney
- (X) Applicant claims small entity status. See 37 CFR 1.27.
- (X) Information Disclosure Statement
- () Assignment and Assignment Recordation
- (X) A check in the amount of \$ 355.00 to cover the filing fee.
- (X) Any additional filing fees or presentation of extra claim fees may be charged to Deposit Account No. 01-2221.

CLAIMS AS FILED

SMALL ENTITY

OTHER THAN A
SMALL ENTITY

FOR	# FILED	# EXTRA	RATE	FEE	OR	RATE	FEE
BASIC FEE	20-20	0	x\$ 9=	\$355.00		x\$ 18=	\$710.00
TOTAL CLAIMS	2-3	0	x\$ 40=	\$		x\$ 80=	\$
INDEP. CLAIMS			x\$135=	\$		x\$270=	\$
MULTIPLE DEP. CLAIM PRESENT				\$355.00		TOTAL	\$

Respectfully submitted,


Howard N. Flaxman
Registration No. 34,595

AQUILINO, WELSH & FLAXMAN, P.C.
2341 Jefferson Davis Hwy., Ste. 112
Arlington, VA 22202
(703) 920-1122
Docket No. LIT-016

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

DECLARATION FOR PATENT APPLICATION

INVENTOR(S): Orrin Klitzner and Samuel Geffen

TITLE: USER INTERFACE FOR A PORTABLE
COMMUNICATION DEVICE

DOCKET NO. : LIT-016

TO THE HONORABLE COMMISSIONER OF PATENTS AND TRADEMARKS:

As a below named inventor, I hereby declare that:

This declaration is of the following type: (check one
applicable item below)

☒ original
☐ design
☐ supplemental

NOTE: *If the declaration is for an International Application
being filed as a divisional, continuation or continua-
tion-in-part application do not check next item; check
appropriate one of last three items.*

☐ national stage of PCT

NOTE: *If one of the following 3 items apply then complete and
also attach ADDED PAGES FOR DIVISIONAL, CONTINUATION OR
CIP.*

☐ divisional
☐ continuation
☐ continuation-in-part (CIP)

My residence, post office address and citizenship are as
stated below next to my name.

I believe I am the original, first and sole inventor (if only
one name is listed below) or an original, first and joint inventor
(if plural names are listed below) of the subject matter which is

claimed and for which a patent is sought on the invention entitled
USER INTERFACE FOR A PORTABLE COMMUNICATION DEVICE, the
specification of which is attached hereto unless the following is
checked:

_____ - was filed on _____ as United States Application Number or
PCT International Application Number _____, and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand the
contents of the above-identified specification, including the
claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is
material to patentability as defined in Title 37, Code of Federal
Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35,
United States Code, § 119(a)-(d) or 265(b) of any foreign
application(s) for patent or inventor's certificate or 365(a) of
any PCT international application which designates at least one
country other than the United States of America, listed below and
have also identified below any foreign application for patents or
inventor's certificate, or of any PCT international application
having a filing date before that of the application on which
priority is claimed.

Prior Foreign Applications:

Priority Claimed:

(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
----------	-----------	------------------------	-----	----

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)	(Status - patented, pending, abandoned)
-------------------	---------------	---

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the National or PCT international filing date of this application.

(Application No.)	(Filing Date)	(Status - patented, pending, abandoned)
-------------------	---------------	---

(Application No.)	(Filing Date)	(Status - patented, pending, abandoned)
-------------------	---------------	---

As the inventor, I hereby appoint the following attorney(s) and/or agent(s) of HERTEN, BURSTEIN, SHERIDAN, CEVASCO, BOTTINELLI & LITT, L.L.C. to prosecute this application and transact all business in the U.S. Patent and Trademark Office connected therewith. Name and registration number are listed below.

Arnold D. Litt

26,296

Please send correspondence to:

Direct telephone calls to:

Arnold D. Litt, Esq.

(201) 342-600, Ext. 210
(201) 342-6611 (fax)

Herten, Burstein, Sheridan, Cevasco,
Bottinelli & Litt, L.L.C.
Court Plaza North
25 Main Street
Hackensack, NJ 07601

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor:


Orrin Klitzner

Residence : Andover, NJ

Citizenship: United States of America

Post Office Address: 29 Lee Hill Road

Andover, NJ 07821

Date: 10/20/00 Signature: 

Full name of second joint inventor, if any:


Samuel Geffen

Residence : New City, NY

Citizenship: United States of America

Post Office Address: 5 Chestnut Grove Court

New City, NY 10956

Date: 10/20/00 Signature: 

LIT-016

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR LETTERS PATENT

INVENTORS: Orrin Klitzner and Samuel Geffen

TITLE: USER INTERFACE FOR A PORTABLE COMMUNICATION DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to an interface device for use with cellular communication devices, for example, cellular telephones. More particularly, the present invention relates to a user interface incorporating a sound tube for transmitting sounds between a cellular telephone and a user.

2. Description of the Prior Art

Recent advances allowing wide spread use of cellular, and other portable, communication devices have not been achieved without some problems. First, it has recently been found that radiation emitted by cellular communication devices may be detrimental to users regularly bringing the communication devices in close proximity to their heads.

Second, many automobile safety groups have found a correlation between cellular communication device use and accidents. It has, therefore, been suggested by many groups that "hands free" devices be used while individuals take telephone calls on cellular communication devices. In addition, many communities, states and civic groups are pushing for legislation requiring the use of "hands free" equipment when cellular communication devices are used in automobiles.

As such, a need exists for a user interface allowing hands free use of cellular communication devices while limiting a user's exposure to potentially harmful radiation. The present invention provides such a user interface.

SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a cellular telephone including a user communication component linking the user to the cellular telephone without the transmitting radiation leakage associated with the use of cellular telephones. The cellular telephone includes a plurality of operating components transmitting outgoing signals and receiving incoming signals. The operating components include an incoming signal output which processes incoming signals and outputs the incoming signals for the user. The telephone further includes an interface linking the operating components to a user. The interface includes a speaker coupled to the incoming signal output. The speaker amplifies and converts incoming signals from the incoming signal output to audible signals. The interface further includes a speaker sound tube linking a user to the speaker, wherein the speaker sound tube includes a first end and a second end. The first end of the speaker sound tube is coupled to the speaker for receiving audible signals generated thereby and the second end includes a user communication component through which the user may listen to the audible signals generated by the speaker.

It is also an object of the present invention to provide a modular interface substantially as disclosed above.

Other objects and advantages of the present invention will become apparent from the following detailed description when viewed in conjunction with the accompanying drawings, which set forth certain embodiments of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic of a cellular telephone with the present interface.

Figure 2 is a schematic of the interface device in accordance with the present invention.

Figures 3-11 are schematics of various embodiments in accordance with the present

5 invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The detailed embodiments of the present invention are disclosed herein. It should be understood, however, that the disclosed embodiments are merely exemplary of the invention, which may be embodied in various forms. Therefore, the details disclosed herein are not to be interpreted as limited, but merely as the basis for the claims and as a basis for teaching one skilled in the art how to make and/or use the invention.

With reference to Figures 1 and 2, a user interface 10 adapted for selective coupling to a cellular telephone 12, or other portable communication device, is disclosed. The user interface 10 links the user to the cellular telephone 12 without transmitting radiation leakage associated with the use of cellular telephones and without requiring the user to utilize his or her hands to communicate via the cellular telephone 12.

As mentioned above, the user interface 10 is adapted for use with currently available cellular telephones 12. Such cellular telephones 12 generally include a plurality of operating components transmitting outgoing signals and receiving incoming signals. Included among these operating components are an incoming signal output 14 for outputting incoming signals for external use by the user and an outgoing signal input 16 which receives and processes outgoing signals for transmission to other individuals. The incoming signal output 14 and the outgoing signal input 16 are commonly accessed via a common jack 18 accessible externally from the housing 20 of the cellular telephone 12. While a preferred embodiment of the present invention is described herein for use with a cellular telephone 12, those skilled in the art will readily appreciate that the present invention may be applied with various

communication devices without departing from the spirit of the present invention.

Referring again to Figures 1 and 2, the user interface 10 includes a housing 22 having an interface jack 24 adapted for electrical communication with the common jack 18 linked to the incoming signal output 14 and the outgoing signal input 16. The interface jack 24 uses
5 conventional electrical connections known to those skilled in the art and commonly employed in the use of external speakers and microphones. While the interface jack 24 in accordance with the present invention is disclosed as electrically linking the user interface 10 to the cellular telephone 12, those skilled in the art will readily understand that other transmission techniques, for example, optical transmissions, may be employed without
10 departing from the spirit of the present invention.

A speaker, and more particularly, a transducer 26, is contained within the housing 22 and electrically coupled to the interface jack 24 for receipt of incoming signals emanating from the incoming signal output 14. For the purposes of the present disclosure a transducer is considered to refer to an electromechanical speaker in a sealed enclosure having an opening for
15 receipt of a hollow tube having a 1 mm diameter. The transducers used in accordance with the present invention are much smaller than even subminiature speakers, but produce a high sound pressure level (SPL). Preferred transducers for use in accordance with the present invention are currently manufactured by Knowles, Tibbetts Industries and Microtronics. The transducer 26 amplifies and converts incoming signals from the incoming signal output 14 to
20 produce audible signals.

Similar, a microphone 28 is contained with the housing 22 and electrically coupled to

the interface jack 24 for the transmission of outgoing messages via the outgoing signal input 16. The microphone 28 amplifies and converts audible outgoing signals for transmission by the cellular telephone 12.

In an effort to conserve the batteries of the cellular telephone 12, the user interface 10
5 may be provided with an internal battery pack 30. The battery pack 30 is electrically linked to both the microphone 28 and the transducer 26 for driving the same during operation of the present user interface 10. The circuitry linking the battery 30, transducer 26, microphone 28 and interface jack 24 is completed by coupling the same to a ground 32. While an alternate battery pack is discussed above, the interface may also draw power from the cellular telephone
10 in accordance with preferred embodiments of the present invention.

Finally, radiation free transmission of audible signals to the user is achieved by coupling the output of the transducer 26 to a transducer sound tube 34. In accordance with a preferred embodiment of the present invention, the transducer sound tube 34 is adhesively or frictionally bound to a male member 35 of the transducer 26. The tube 34 is preferably
15 constructed of an elastomeric material, such as, rubber, neoprene, silicone, urethane. However, other materials may be used without departing from the spirit of the present invention. The material chosen for the tubing should be flexible, non-kinking and UV stabilized. The tubing may also offer coiling ability.

The transducer sound tube 34 links a user to the transducer 26, and ultimately to the
20 cellular telephone 12. The transducer sound tube 34 includes a first end 36 and a second end 38. The first end 36 of the transducer sound tube 34 is coupled to the transducer 26 for

receiving audible signals generated thereby and the second end 38 includes a user communication component, for example, an earpiece 40, through which the user may listen to the audible signals generated by the transducer 26. The earpiece is preferably injection molded, although it may take a variety of forms without departing from the spirit of the present invention.

Similar radiation free transmission on the microphone 28 side is achieved by coupling the input of the microphone 28 to a microphone sound tube 42. The microphone sound tube 42 links a user to the microphone 28, and ultimately to the cellular telephone 12. The microphone sound tube 42 includes a first end 44 and a second end 46. The first end 44 of the microphone sound tube 42 is coupled to the microphone 28 and the second end 46 remains free for receiving audible signals generated by the user. In accordance with a preferred embodiment of the present invention, a condenser microphone is used. The condenser microphone offers sensitivity, small size and cost effectiveness. However, other microphones may be used in accordance with the spirit of the present invention.

Both the microphone sound tube 42 and the transducer sound tube 34 are simply filled with air and rely upon the acoustics of the tube in transmitting sound waves from one end of the tube to the other. As such, none of the radiation sometimes associated with electrical transmissions is brought near the user of the cellular telephone, since the air contained within the tubes is incapable of carrying radiation as the sound waves move from one end of the tube to the other end of the tube.

In accordance with an alternate embodiment, and with reference to Figures 3 and 3A,

the transducer sound tube 134 may be provided with a valve 148 limiting the volume of the audible signal reaching the ear of a user. The valve 148 includes a shaft 150 couple to a diaphragm 152 positioned within the tube 134. The shaft 150 is rotated to turn the diaphragm 152 and control the sound passing through the tube 134.

5 Referring to Figure 4, the interface 210 in accordance with the present invention may be further enhanced with the provision of a pressure actuated switch tube 250 for answering the cellular telephone. The pressure actuated switch tube 250 includes a closed, pressurized tube 252 accessible to the user of the interface 210. The closed tube 252 includes a closed first end 254 which may be provided with a bulb 256 for gripping by the user. The closed second end 258 is housed within the housing 222 of the user interface 210 and is linked to a pressure sensitive switch 260. As such, when the first end 254 of the tube 252 is pressed, the pressure with the tube 252 increases and activates the pressure sensitive switch 260 located within housing 222. The pressure sensitive switch 260 then converts the pressure signal to an electrical signal which is transmitted to the cellular telephone via the interface jack 224.

15 With reference to Figure 5, a further embodiment of the present invention is disclosed. In accordance with this disclosed embodiment, the interface 310 described above, i.e., the jack, transducer and microphone, are integrally formed within a conventional battery pack 362. Since these battery packs are commonly replaceable, and have been used in conjunction with cellular telephones since the time they were originally introduced to the public, individuals
20 using phones which do not include a jack as discussed above may still take advantage of the present system by simply replacing their existing battery pack with one including an interface

in accordance with the present invention.

Similar, and with reference to Figure 6, a further embodiment is disclosed in which the interface 410 is integrally formed with the cellular telephone 412. This embodiment utilizes the same components as disclosed in accordance with the embodiment of Figure -, but
5 integrates the interface within the housing of the cellular telephone.

With reference to Figure 7, because the negative effects associated with radiation exposure are more commonly associated with the transducer that may be pressed directly into contact with the user ear, the interface 510 in accordance with the present invention may be formed with only a transducer 526 and rely upon a separate structure for the microphone.

Figure 8, discloses a further embodiment in which the microphone sound tube and the transducer sound tube are formed as a single unit 664 with separate lumen 634,642.

Referring to Figure 9, an alternate speaker 726 arrangement for use in accordance with the present invention is disclosed. The speaker 726 includes a miniature driver 728 having a cover 730 secured thereto. The driver 728 and cover 730 are sealed within a container 732 and
15 the transducer sound tube 734 is passed through the container 732 and cover 730 for access to vibrations generated by the driver 728.

With reference to Figures 10 and 11, a further embodiment of the present invention is disclosed. The disclosed embodiment 810 employs a microphone 866 and speaker 868, powered by a battery 869, within the earpiece 840 to improve the sound generated by the
20 present system. Specifically, a microphone 866 is coupled to the distal end 838 of the sound tube 834. The microphone 866 receives incoming sound from the tube 834, converts the

sound to an electrical signal and transmits the same to an amplifier 870 within the earpiece
840. The amplifier then transmits an amplified signal through a volume control 872 and into
the speaker 868 which converts the signal to an audible sound.

While the preferred embodiments have been shown and described, it will be
5 understood that there is no intent to limit the invention by such disclosure, but rather, is
intended to cover all modifications and alternate constructions falling within the spirit and
scope of the invention as defined in the appended claims.

CLAIMS

1. A cellular telephone including a user communication component linking the user to the cellular telephone without the transmitting radiation leakage associated with the use of cellular telephones, comprising:

a plurality of operating components transmitting outgoing signals and receiving incoming signals, the operating components including an incoming signal output which processes incoming signals and outputs the incoming signals for the user;

an interface linking the operating components to a user, the interface including:

a speaker coupled to the incoming signal output, the speaker amplifying and converting incoming signals from the incoming signal output to audible signals;

a speaker sound tube linking a user to the speaker, wherein the speaker sound tube includes a first end and a second end, the first end of the speaker sound tube being coupled to the speaker for receiving audible signals generated thereby and the second end including a user communication component through which the user may listen to the audible signals generated by the speaker.

2. The cellular telephone according to claim 1, wherein the incoming signal output includes a jack, and the interface is selectively coupled to the jack for receiving incoming signals.

3. The cellular telephone according to claim 1, wherein the user communication component is an earpiece.

4. The cellular telephone according to claim 1, wherein the operating components further include an outgoing signal input which processes outgoing signals for transmission to other individuals, and the interface further includes a microphone amplifying and converting audible outgoing signals for transmission coupled to the outgoing signal input and a microphone sound tube linking a user to the microphone, wherein the sound tube includes a first end and a second end, the first end of the microphone sound tube being coupled to the microphone and the second end remaining free for receiving audible signals generated by the use.

5. The cellular telephone according to claim 4, wherein the incoming signal output and the outgoing signal output share a common jack, and the interface is selectively coupled to the jack for receiving incoming signals and transmitting outgoing signals.

6. The cellular telephone according to claim 1, wherein the interface includes a battery supplying power to the microphone.

7. The cellular telephone according to claim 1, wherein the interface further includes means for controlling the volume of audible signals generated by the speaker.

8. The cellular telephone according to claim 7, wherein the means for controlling is a valve positioned within the speaker sound tube.

9. The cellular telephone according to claim 9, wherein the operating components include a battery and the interface is integrally formed with the battery.

10. The cellular telephone according to claim 1, wherein interface is integrally associated with the operating components.

11. The cellular telephone according to claim 1, wherein the interface includes a battery supplying power to the speaker.

12. An interface selectively coupled to a cellular telephone for linking the user to the cellular telephone without transmitting radiation leakage associated with the use of cellular telephones, the cellular telephone includes a plurality of operating components transmitting outgoing signals and receiving incoming signals, the operating components including a incoming signal output jack for outputting incoming signals for external use by the user, the interface comprising:

a housing having a interface jack shaped and dimensioned for selective receipt within the incoming signal output jack;

a speaker contained within the housing and linked to the interface jack, the speaker amplifying and converting incoming signals from the incoming signal output jack to audible signals;

a speaker sound tube linking a user to the speaker, wherein the speaker sound tube includes a first end and a second end, the first end of the speaker sound tube being coupled to the speaker for receiving audible signals generated thereby and the second end including a user communication component through which the user may listen to the audible signals generated by the speaker.

13. The interface according to claim 12, wherein the interface jack is electrically coupled to the incoming signal output jack.

14. The interface according to claim 12, wherein the user communication component is an earpiece.

15. The interface according to claim 12, wherein the operating components of the cellular telephone further include an outgoing signal input jack which receives and processes outgoing signals for transmission to other individuals, and the interface further includes a microphone amplifying and converting audible outgoing signals for transmission coupled to the outgoing signal input jack and a microphone sound tube linking a user to the microphone, wherein the microphone sound tube includes a first end and a second end, the first end of the microphone sound tube being coupled to the microphone and the second end remaining free for receiving audible signals generated by the use.

16. The interface according to claim 15, wherein the interface includes a battery supplying power to the microphone.

17. The interface according to claim 12, wherein the interface further includes means for controlling the volume of audible signals generated by the speaker.

18. The interface according to claim 17, wherein the means for controlling is a valve positioned within the speaker sound tube.

19. The interface according to claim 12, wherein the interface is integrally formed with a cellular telephone battery that is selectively coupled to the cellular telephone.

20. The interface according to claim 12, wherein the interface includes a battery supplying power to the speaker.

ABSTRACT OF THE DISCLOSURE

A cellular telephone including a user communication component linking the user to the cellular telephone without the transmitting radiation leakage associated with the use of cellular telephones. The cellular telephone includes a plurality of operating components transmitting outgoing signals and receiving incoming signals. The operating components include an incoming signal output which processes incoming signals and outputs the incoming signals for the user. The telephone further includes an interface linking the operating components to a user. The interface includes a speaker coupled to the incoming signal output. The speaker amplifies and converts incoming signals from the incoming signal output to audible signals. The interface further includes a speaker sound tube linking a user to the speaker, wherein the speaker sound tube includes a first end and a second end. The first end of the speaker sound tube is coupled to the speaker for receiving audible signals generated thereby and the second end includes a user communication component through which the user may listen to the audible signals generated by the speaker.

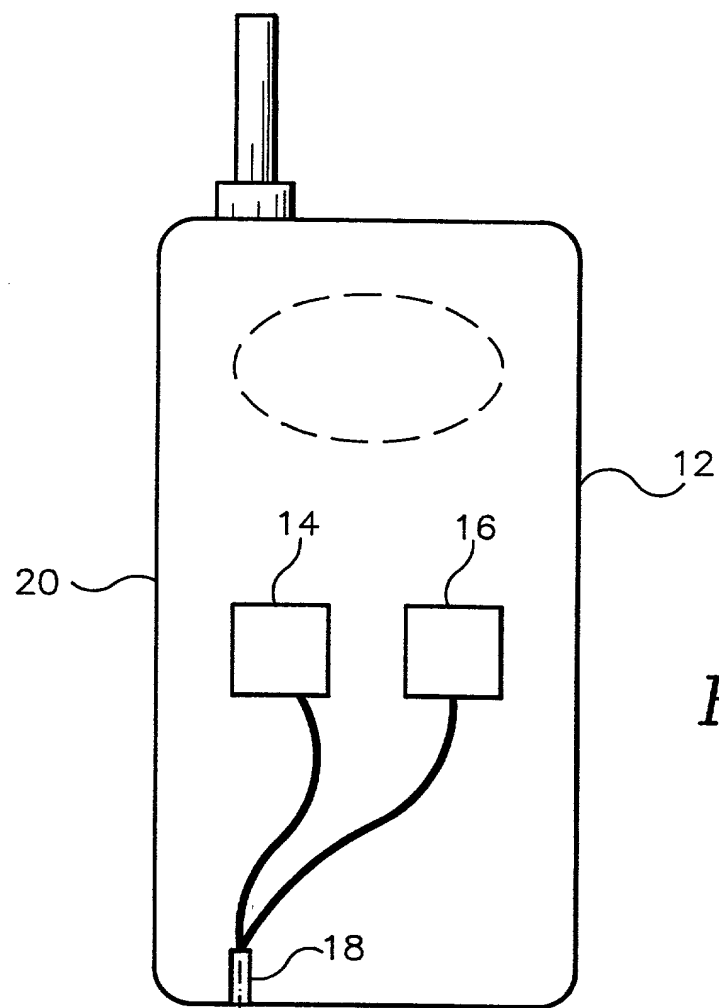


FIG. 1

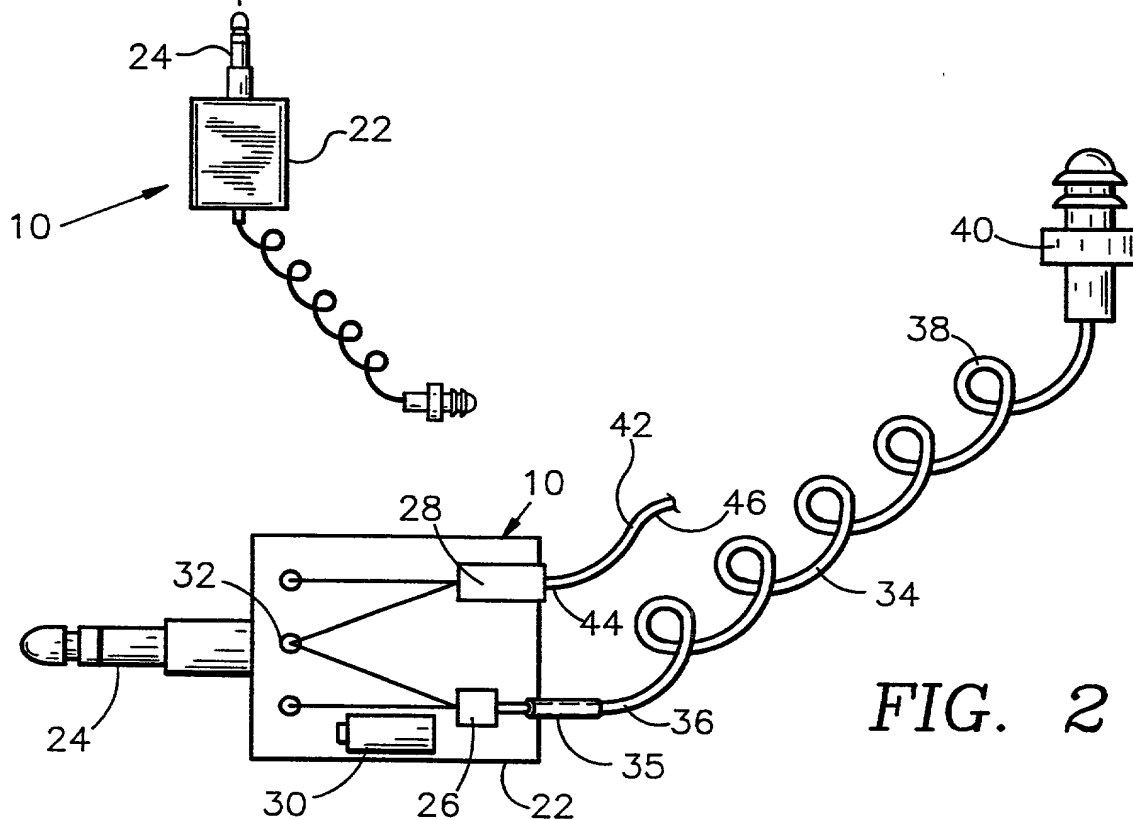


FIG. 2

